

HEMSPAN® is the licensed UK distributor for USA based HempWood®

HempWood® Organic Flooring is a suitable replacement for traditional solid hardwoods, such as Oak, for interior flooring applications.

Other HempWood® applications include - benches, shelves, cutting boards, trim, window frames, dressers, tables, and more! If you would like to know more about HempWood® lumber, please email admin@hemspan.com

- Carbon negative
- Sustainable
- Durable



Characteristics

Carbon negative and sustainable
No VOCs & non-toxic
Class 1 Fire Rating (USA)
Durable

Applications

Residential & commercial flooring

Pack Information

10 boards per pack (1.86m² maximum per pack) 20-23kg per pack
60 Packs per pallet (111.50m² maximum per pallet) 1250kg per pallet


Laying

Prefabricated components make HempWood® easy to use. Installation methods include nailing, glueing and floating in herringbone or random pattern. Locking is achieved with tongue and groove placement of the planks.

Sizes available:

Dimensions: Width 16mm X 127mm X1220-1650mm. Lengths vary according to visual satisfaction.

Colours available:

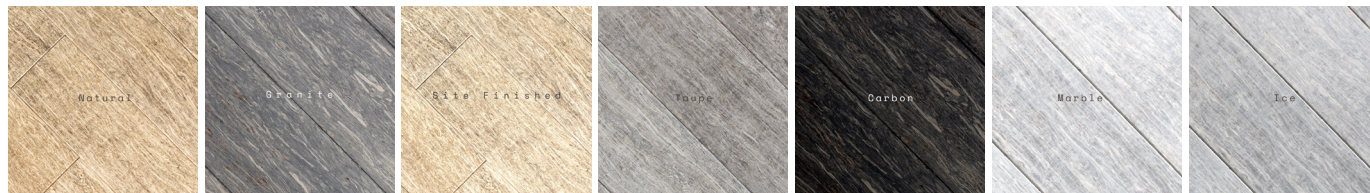

Samples of **natural**, **site-finished** and **taupe** available immediately from our shop

TEST RESULTS

Item	Standard	Result
Density	ASTM D2395	960kg/m ³
Hardness	ASTM D1037 - 6a (Janka Ball)	2200lbf
Dimensional Stability	ASTM D1037 (20-90% RH)	Swell 0.02/0.06/0.77%
Fire Rating	ASTM E 648	Rating: Class 1
Abrasion Resistance*	ASTM 1037	1600-1800 revs (WRO)
Scratch Resistance*	ASTM 1037	21N
Slip Resistance*	BGR 151/ DIN 51130	R10
Formaldehyde Emissions*	CARB 2 & TSCA VI	Compliant
VOCs Emissions*	ASTM D6007-14	BLQ= <0.008ppm

All tests completed in the USA

*With Bona coating

